



Exterior awning

markilux 770 tracfix

The clean and concise exterior awning for medium-sized areas.



reddot design award
winner 2017



markilux.com

markilux

safe timeless beautiful

Product characteristics


Wind resistance class 3

Beaufort 6 → 38–48 km/h → 10.5–13.4 m/s → 24–30 mph


01
02
03
04
05
06
07
08
09
10
11
12
13
14
15
16
17
18
19
20




1 side view track-only fixture

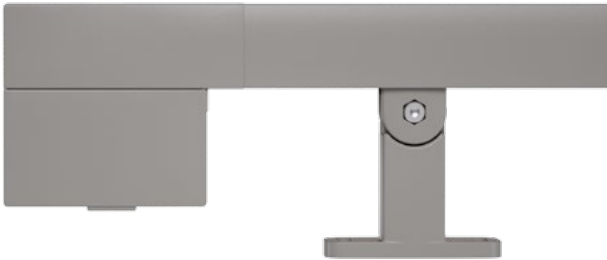

2 front profile finishes flush with the end of the guide tracks

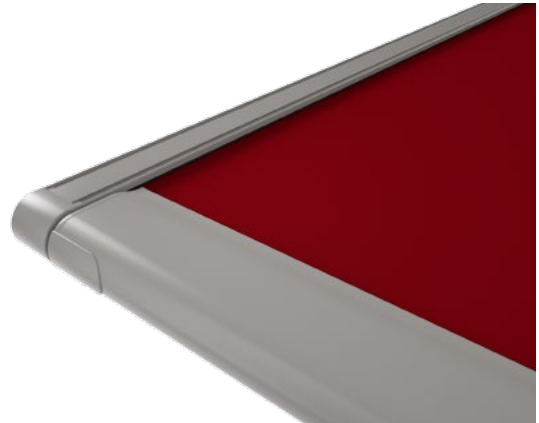

3 tracfix cover guidance – no gap between cover and guide track

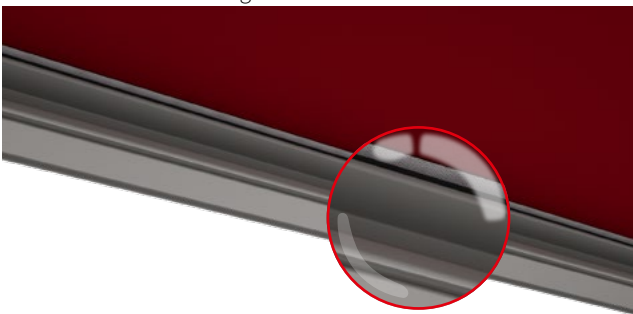

Product characteristics

Description

- exterior awning for conservatories and glass canopies. One awning can shade an area of up to 16 m².

Special features

- fully encompassing cassette that protects the cover perfectly
- tried and tested tensioning system with drive belts and integrated gas pistons – delivers optimum cover tension in any phase of extension
- as standard with tracfix, the continuous lateral cover guidance system that leaves no gap between the cover and guide tracks – gives improved wind stability and a cleaner appearance
- the broad range of brackets with patented clip-on system offers individual fixture solutions

Dimensions

- single unit: 60 cm – 400 cm in width, maximum extension 400 cm
- maximum dimensions, width × extension: 400 cm × 400 cm
- intermediate sizes are available

Roller tube and lateral bearings

- round roller tube Ø 85 mm with keyway, galvanised steel – excellent stability, ensures near perfect cover performance even at the largest widths
- the roller tube bearing is made of stainless steel

Awning profiles

- extruded aluminium, in façade quality, powder coated
- cassette profile in two pieces, round, height × depth 125 mm × 125 mm
- guide tracks angular, rounded edges, width × height 52 mm × 52 mm
- front profile rounded at the front, depth × height 110 mm × 52 mm

Side caps

- the cassette end caps are made of die-cast aluminium, in two parts, powder coated
- the front profile end caps are made of high-quality plastic, powder coated

Fixture brackets

- extruded aluminium, powder coated
- cassette is self-supporting on guide tracks
- brackets for the guide tracks: stand-off brackets, reveal fixture, flat track brackets for lateral fixture
- standard bracket heights: 105 mm / 145 mm / 100–500 mm (bespoke heights can be ordered)
- other accessories are available

01

02

03

04

05

06

07

08

09

10

11

12

13

14

15

16

17

18

19

20

01 **Frame colours**02 **markilux frame colours without surcharge**

03 traffic white RAL 9016



04 metallic aluminium RAL 9006



05 grey brown, similar to RAL 8019

06 off-white textured finish, 5233 ¹⁾07 stone grey metallic, 5215 ¹⁾08 anthracite metallic, 5204 ¹⁾09 Havana brown textured finish, 5229 ¹⁾

16

17

18

19

20

Non-standard powder-coated finish

Bespoke frame colours at a surcharge – matt, metallic and pearl finishes as well as other colour ranges (DB, Tiger etc.) on request. All frame colours are available at a surcharge with enhanced corrosion protection.

1) textured finish

Colours may differ slightly from those depicted in both hue and finish.


Dimensions and configuration options


Single unit


Order dimensions	Awning fixture width						Minimum fixture width	
	150	200	250	300	350	400	Hard-wired motor	Radio-contr. motor
	60	151	201	251	301	351		
	150	200	250	300	350	400		
Overall width	+ 5.4							
H	150						72	82
	200							
	250							
	300						107 ¹⁾	107 ¹⁾
	350							
	400							

dimensions in cm

1) = from an extension of 281 cm
H = extension

 = 4 brackets

 = 6 brackets

 = 6 brackets, 1 cover support tube

Operation	standard	optional
crank handle	—	—
hard-wired motor	✓	—
silentec motor (optionally with an external io / RTS receiver)	—	—
radio-controlled motor io, 868 MHz	—	✓
radio-controlled motor RTS, 433 MHz	—	✓
radio-controlled motor RTS, 433 MHz with manual override	—	—

Coupled Awning
not available

Optional accessories
automatic controls (light, wind, rain)

N.B! – Important background information can be found in the chapter “Optional Accessories”.

Shadeplus / drop valance
not available















Aawning cover	fabric range no.	standard	optional	awning fixture width	extension	cover manufacture
sunvas	301.. / 309..-315..	✓	—	≤ 400	≤ 400	LN
sunsilk	324.. / 325.. / 328.. / 369..	✓	—	≤ 400	≤ 400	LN
perfotex	331.. / 332..	✓	—	≤ 400	≤ 400	LN
sunvas (250 cm)	31008, -09, -13, -16, -18, -25, 27, -28, -31, -36, -37, -57, -58, 31109, -14, -17	✓	—	≤ 250		N
				≤ 400	≤ 243	N
transolair	338..	—	✓	≤ 400	≥ 244 ≤ 400	QN
				≤ 320		N
sunvas (320 cm)	31008, -09	✓	—	≤ 400	≤ 313	N
				≤ 400	≥ 314	QN
				≤ 400	< 244	N
vuscreen Alu	317..	—	✓	≤ 400	≥ 244 ≤ 400	QN
				≥ 401	≤ 250	N
				≤ 185	≤ 300	N
Soltis Perform 92	92-20..	—	✓	≤ 400	≤ 194	N
				≥ 186 ≤ 400	≥ 195 ≤ 300	QN
perla	370..	—	—			
perla FR	374.. / 375..	—	—			

dimensions in cm

- N = seamless
- LN = vertical seam(s), panel width usually 120 cm
- QN = horizontal seam(s)


01
02
03
04
05
06
07
08
09
10
11
12
13
14
15
16
17
18
19
20

Fixtures, fittings and accessories

 <p>track bracket with adjustable head 100 mm</p> <p>76046.</p>	 <p>double track bracket with adjustable head central bracket for 2 single units next to one another 100 mm</p> <p>73634.</p>	 <p>track bracket for conservatory transom fixture 100 mm</p> <p>76055.</p>
 <p>universal track bracket 100 mm</p> <p>76054.</p>	 <p>track bracket with adapter plate 100 mm</p> <p>76199.</p>	 <p>track bracket for rigid track-only-fixture 100 mm</p> <p>76017.</p>
 <p>track bracket for rigid track-only fixture by the metre, not pre-drilled 100 mm maximum length: 6 m</p> <p>76013.</p>	 <p>track bracket with adjustable head 140 mm</p> <p>76048.</p>	 <p>double track bracket with adjustable head central bracket for 2 single units next to one another 140 mm</p> <p>73636.</p>
 <p>track bracket top and bottom with adjustable head 200–500 mm</p> <p>76045.</p>	 <p>track bracket with adjustable head 100–500 mm</p> <p>76047.</p>	 <p>universal track bracket with adjustable head 140–500 mm</p> <p>76053.</p>
 <p>flat track bracket with adjustable head for lateral guide track fixture</p> <p>76049.</p>	 <p>cover cap for square track bracket standard accessory for bracket</p> <p>76718.</p>	

dimensions in mm


Fixtures, fittings and accessories



spacer plate
track bracket

110 × 40 × 10 mm


78570.



adapter plate
for track bracket

110 × 60 × 10 mm


78158.



adapter plate
for track bracket


110 × 60 × 10 mm

78165.




angled mounting bracket

76098.




angled mounting bracket
76098. including fastening
bolts

76099.



fixture bracket for light
and/or wind and/or rain
sensor

76050.



bracket for sun and/or
wind sensor io

76723.


- 01
- 02
- 03
- 04
- 05
- 06
- 07
- 08
- 09
- 10
- 11
- 12
- 13
- 14
- 15
- 16**
- 17
- 18
- 19
- 20

dimensions in mm

Fixture types


21

Clearance 105 mm

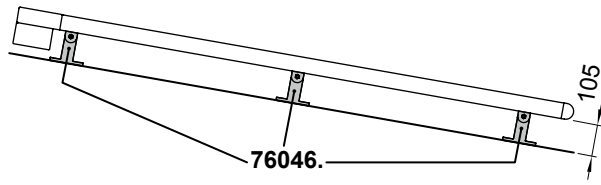


22

Clearance 145 mm

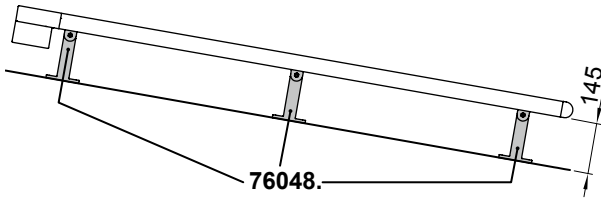


30

Flat track bracket

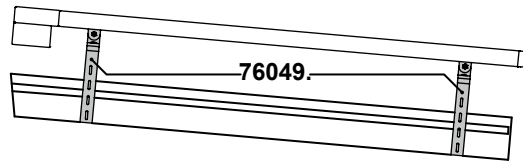


Individual choice of brackets:
see "Fixtures (optional)". When extension > 300 cm always with 3 brackets per guide track.


Dimension overview

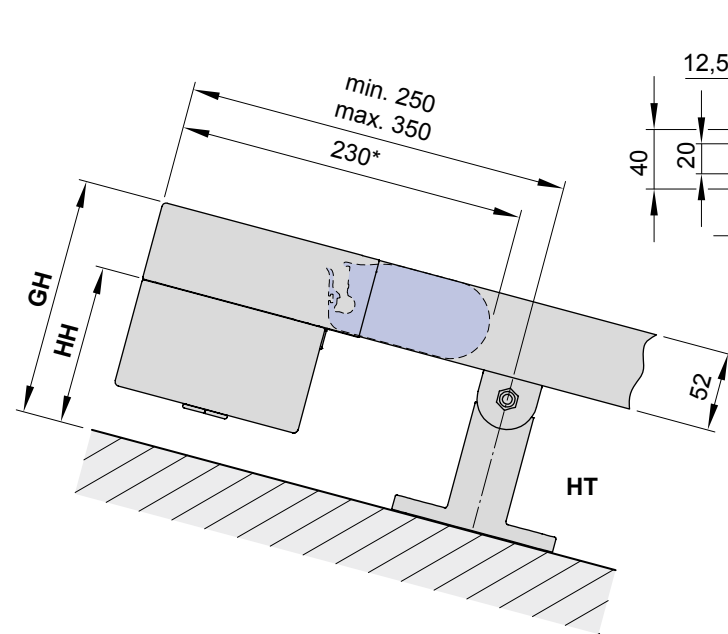

Fixture type 21, 22

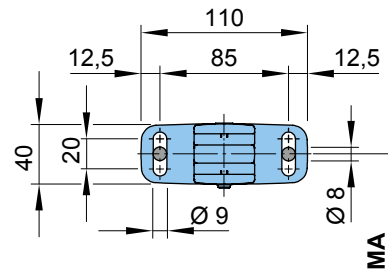

Fixture type 30

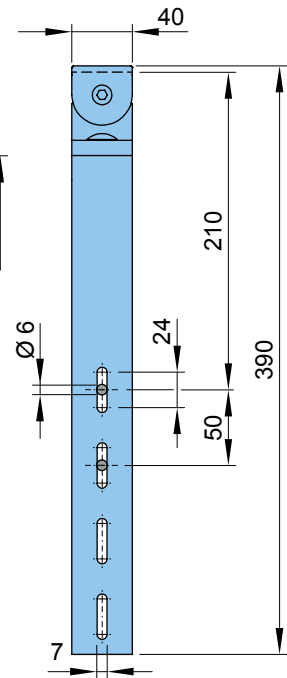

Fixture type 21

Fixture type 22

Fixture type 30

HT	= bracket	76046.	76048.	76049.
HH	= bracket height	105	145	ca. 195–335
GH	= overall height	157	197	ca. 247–387


MA = *order dimension* = awning fixture width = fixture width

* = unit depth when retracted



dimensions in mm

Dimension overview

Single unit

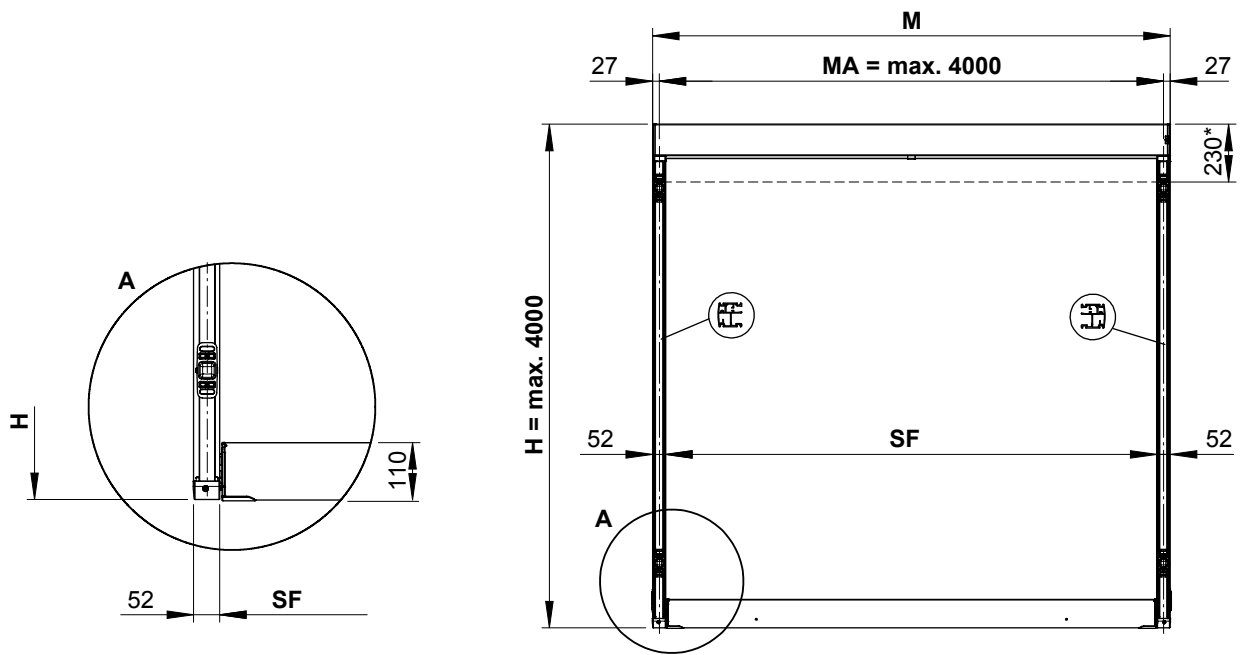

Two single units - fixture via double track brackets

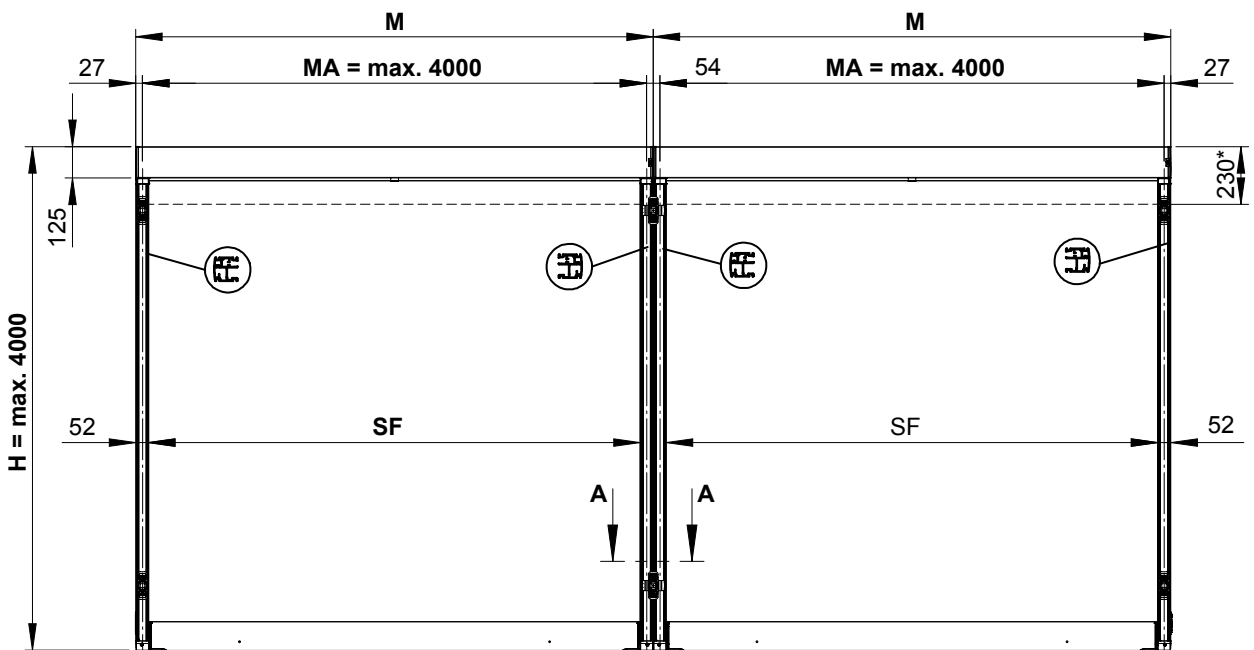


- * = unit depth when retracted
- H = *order dimension* = extension
- HH = bracket height
- M = overall awning width
- MA = *order dimension* = awning fixture width = fixture width
- SF = visible cover area

dimensions in mm

01
02
03
04
05
06
07
08
09
10
11
12
13
14
15
16
17
18
19
20


Dimension overview fixture types 21, 22

Fixtures, fittings and accessories




track bracket with adjustable head
100 mm

76046.




double track bracket with adjustable head
central bracket for 2 single units next to one another
100 mm

73634.





track bracket with adjustable head
140 mm

76048.



double track bracket with adjustable head
central bracket for 2 single units next to one another
140 mm

73636.

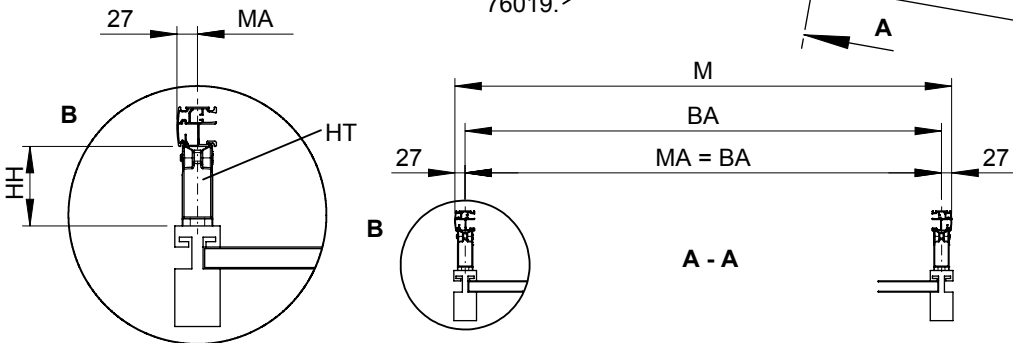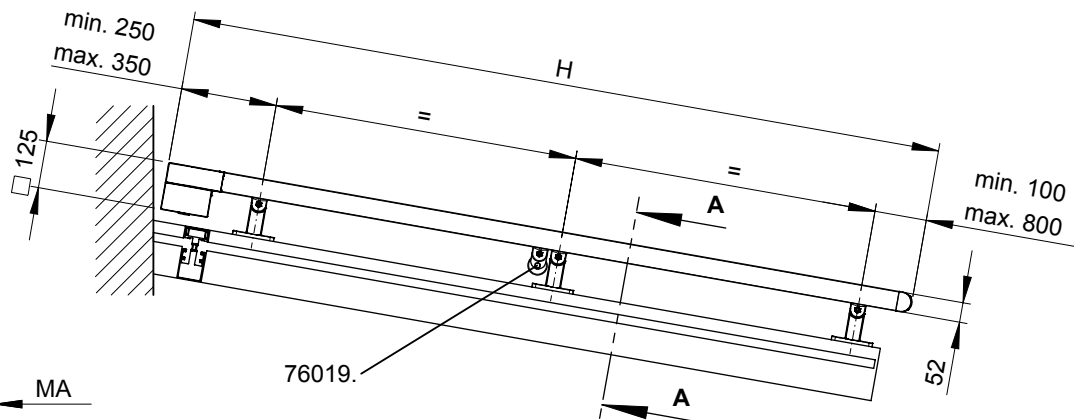

76019. = bracket for cover support tube

BW = width between fixture points on the conservatory

H = *order dimension* = extension

HH = bracket height



HT = bracket

M = overall awning width

MA = *order dimension* = awning fixture width = fixture width dimensions in mm

Dimension table fixture combination 30

Fixtures, fittings and accessories

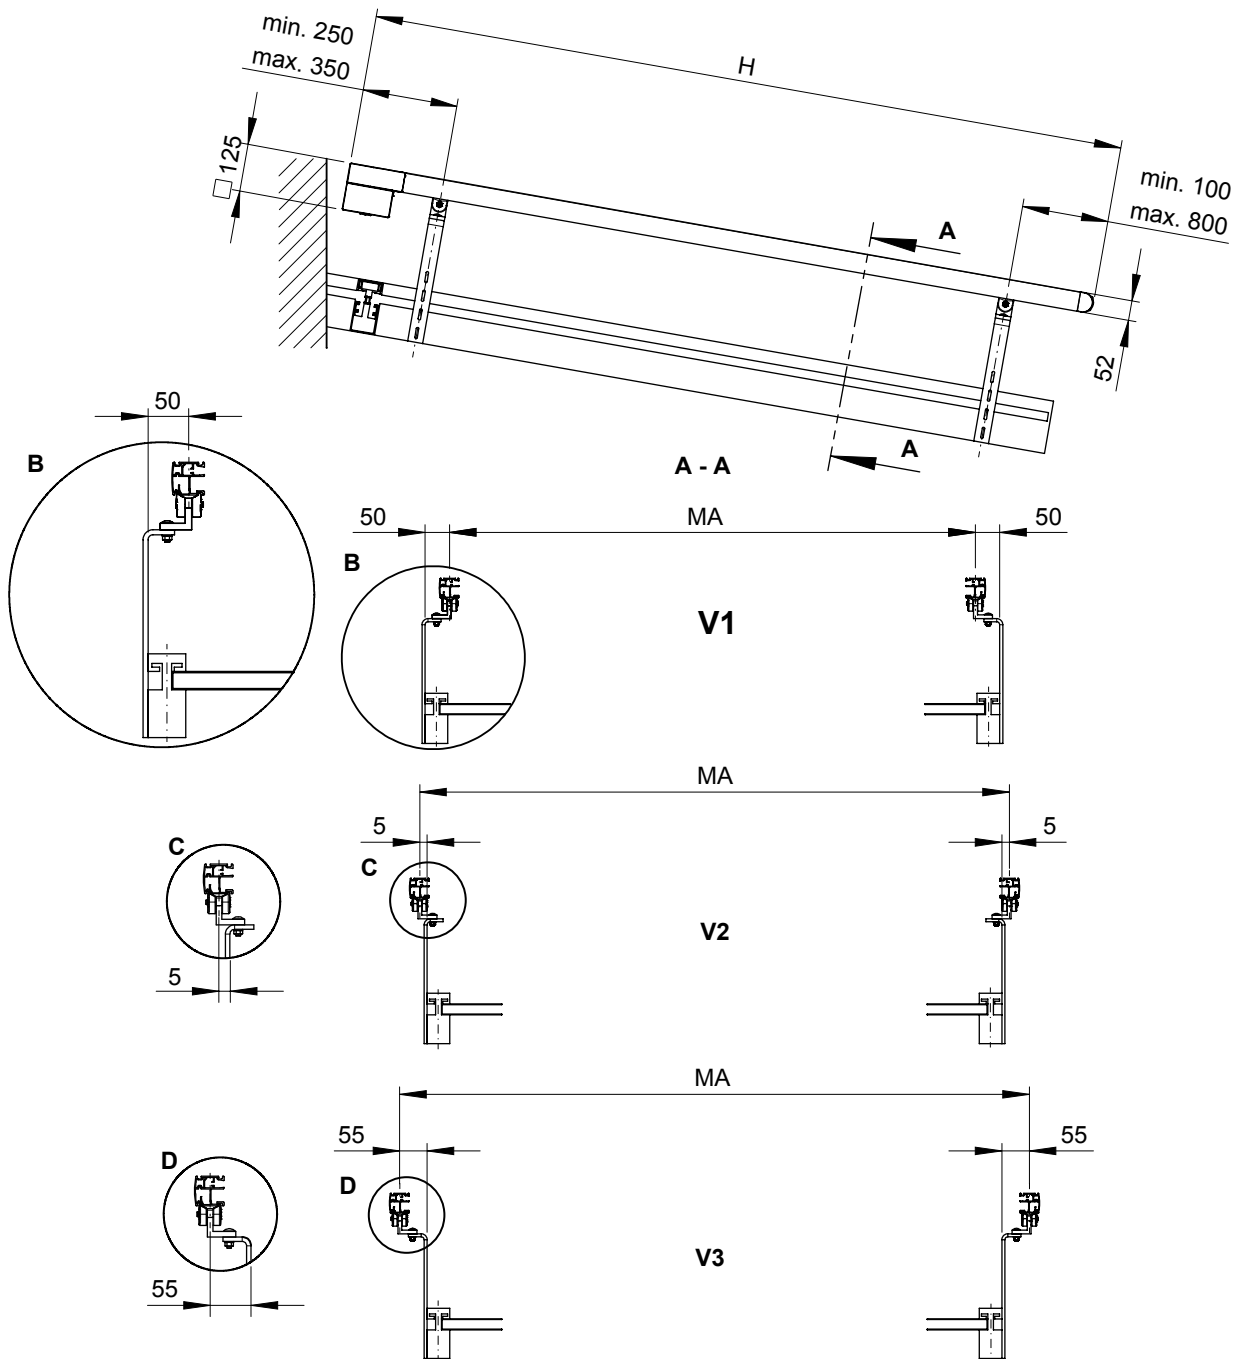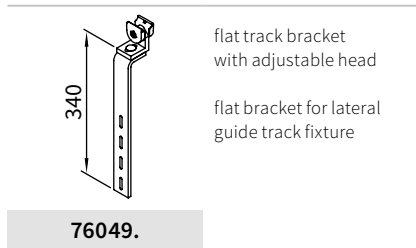


- H = order dimension = extension
- MA = order dimension = awning fixture width = fixture width
- V1, V2, V3 = version

dimensions in mm

01
02
03
04
05
06
07
08
09
10
11
12
13
14
15
16
17
18
19
20


Dimension overview eaves fixture with additional bracket fitting

Fixtures, fittings and accessories




track bracket accessory for track fixture directly on top of the glazing bars (width 14 mm)

76804.





track bracket accessory for track fixture directly on top of the glazing bars (width 25 mm)

76805.

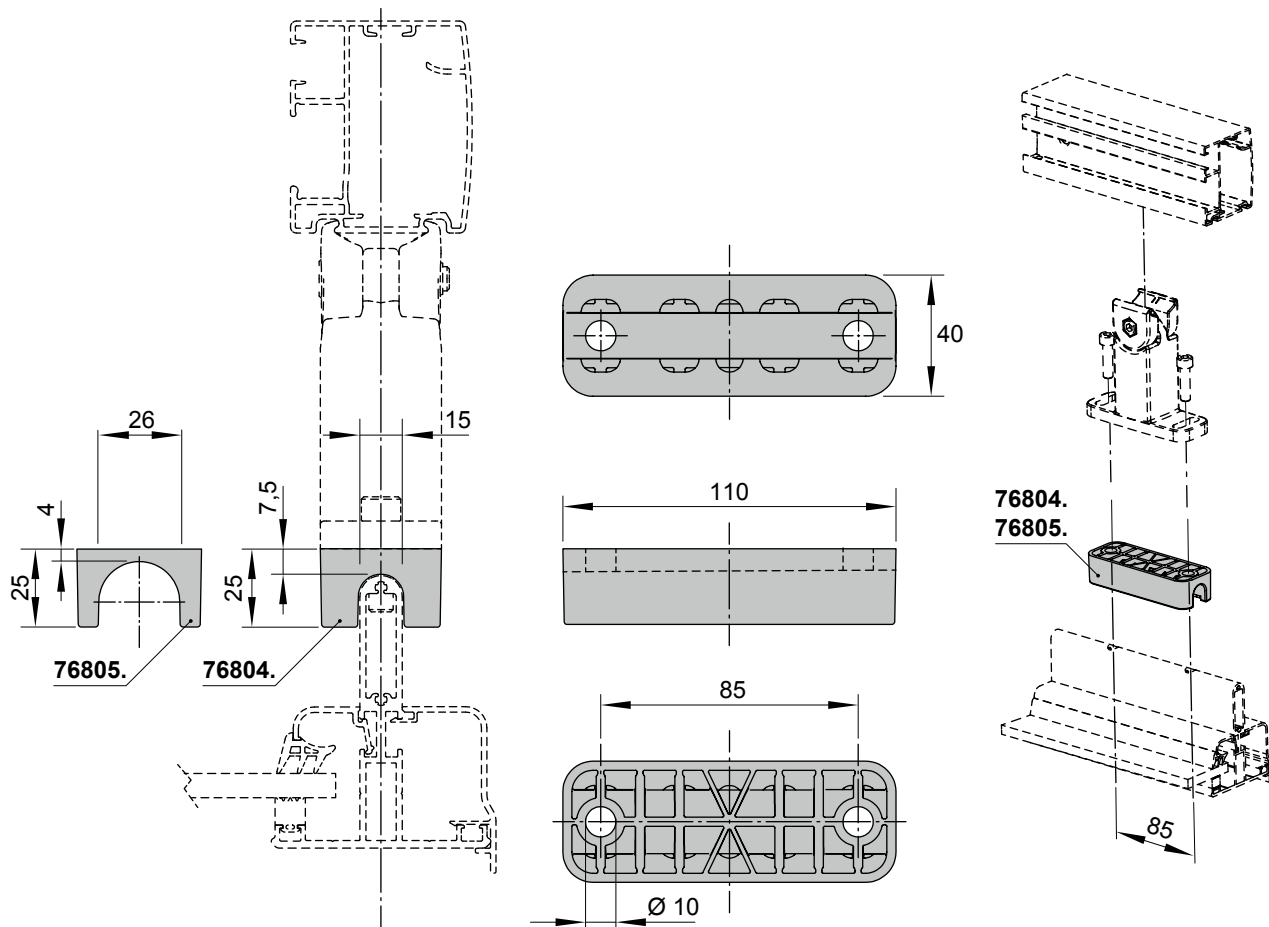

dimensions in mm

Motor cable exit point

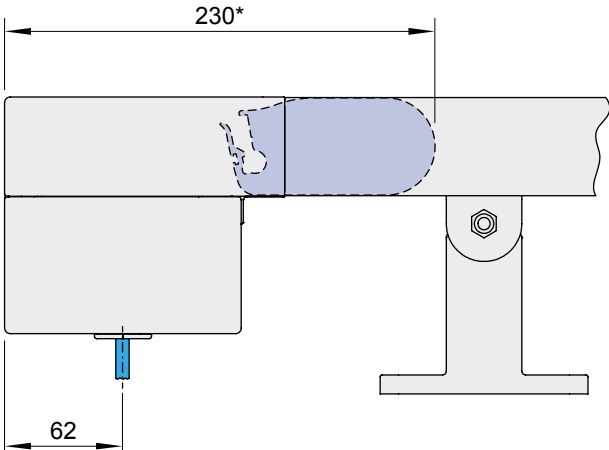

- 01
- 02
- 03
- 04
- 05
- 06
- 07
- 08
- 09
- 10
- 11
- 12
- 13
- 14
- 15
- 16**
- 17
- 18
- 19
- 20

* = unit depth when retracted

dimensions in mm

01

02

03

04

05

06

07

08

09

10

11

12

13

14

15

16

17

18

19

20