

markilux spotline LED

The elegant light bar with adjustable LED spotlights in an aluminium housing





The elegant light bar ...

with adjustable LED spotlights in a powder-coated aluminium housing

one radio receiver and one special hand-held radio transmitter ensure convenient operation at the touch of a button

the brightness can be dimmed using the hand-held radio transmitter and the light colour can be adjusted from soft white to daylight white (3000 to 5500 Kelvin)

08

01

02

03

04


05

06


07

08


Quantity of brackets and LED spotlights and their distance from one another

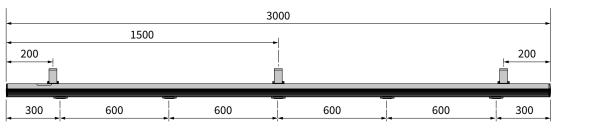

markilux spotline LED with 5 spotlights and 3 brackets



markilux spotline LED with 3 spotlights and 2 brackets



markilux spotline LED with 2 spotlights and 2 brackets


Housing colours

		standard	optional
traffic white	RAL 9016		
metallic aluminium	RAL 9006		
grey brown similar to	o RAL 8019		
off-white textured finish	5233		
stone grey metallic	5215		
anthracite metallic	5204		
Havana brown textured f	inish 5229		
non-standard powder-cc	oated finish		

Colours similar to those in the RAL chart. Colours may differ slightly from those depicted in both hue and finish.

* not compatible with Somfy radio controls

connecting plug (Hirschmann STAK3 connector)



side view of the markilux spotline LED illustrating face fixture dimensions in mm

Technical data for LED spotlights

power supply	230 V, 50 Hz ~
protection category	protected against water spray IP 24
protection class	Ι
wiring cross section	H05RN-F 3G 3 × 1.0 mm2
power output (per spotlight)	4 Watts
light intensity range	0-100 %
colour temperature range	3000—5500 Kelvin

No. of spotlights	2	3	5
length	120 cm	180 cm	300 cm


Technical specification of the radio remote control*

· ·	
transmission frequency	433.92 MHz
battery	CR 2032, 3 Volt
H05SS	3 × 1.0 mm ² 1 = neutral N (blue) 2 = live L (brown) 3 = unused PE = earth E (yellow / green)


01

Fixtures, fittings and accessories

Brackets for fixture of 2 markilux spotline LEDs to the markilux syncra 2

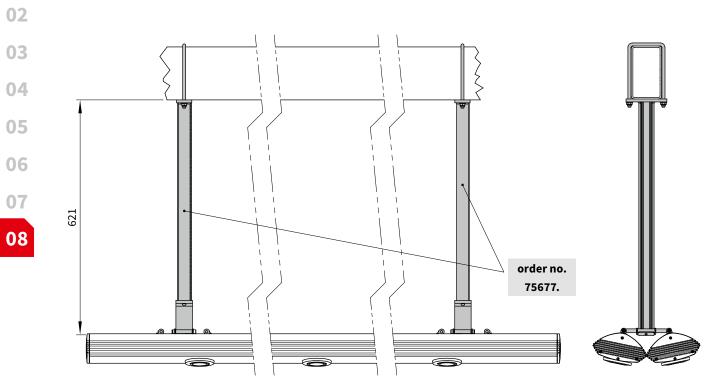

Brackets for fixture of the markilux spotline LED to the markilux syncra 2

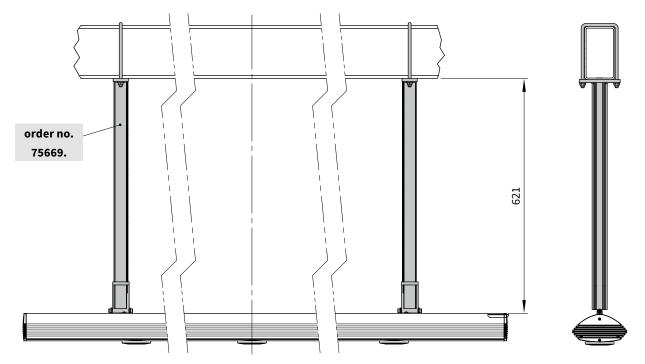

dimensions in mm . = insert RAL colour code no.

01

02

03

04

05


06

07

08




Fixtures, fittings and accessories



Additional brackets for the markilux infrared heater, E-Box, etc.





fixture to the torque bar Ø 50 mm; of the: markilux 1500, markilux 1600, markilux 1650, markilux 1700, markilux 1710

. = insert RAL colour code no.