



# HC 80 00 STAINLESS

## EXTERNAL CRANK OPERATED ROLLER BLIND SYSTEM

Designed to control the entry of natural light, heat and solar energy from the outside, external screens allow you to extend outdoor living areas while maximising the advantages of glass.

This stylish manually operated external roller system is ideal for large sized blinds in a commercial or domestic application. The HMC 80 00 STAINLESS comes with easy to use crank operation and a choice of sleek aluminium side channels or stainless steel guide cables. A weighted base bar ensures ideal presentation of the fabric at all times. Helioscreen external systems will reduce the sun's heat by up to 90% and come with a 5 year warranty.

**MINIMUM WIDTH:** 800mm  
**MAXIMUM WIDTH:** 3800mm  
**MAXIMUM DROP:** 3600mm  
**LINKABLE:** NO

### BRACKETS

- 100 x 52.5mm fixing plate, 116.5mm Projection. Polished Stainless Steel
- Stainless Steel plate and pin at Idler end.

### TUBE

- Galvanised Steel
- 80mm diameter
- 2mm wall thickness

### GUIDING SYSTEM OPTIONS


- 316 Marine Grade Stainless steel cables and cable fixings
- Cable fixings: choice of wall fix, timber deck fix, or masonry bottom fix
- Rectangular channels 20 x 26mm

### BASE BAR

- Lead weighted 18mm x 35mm extruded aluminium base bar Helio style
- Lead weighted Teardrop base bar 22 x 37 mm
- Clear anodised or custom powder-coated finish

### CONTROL

- Gearbox operation. 7:1 ratio
- Detachable crank handle

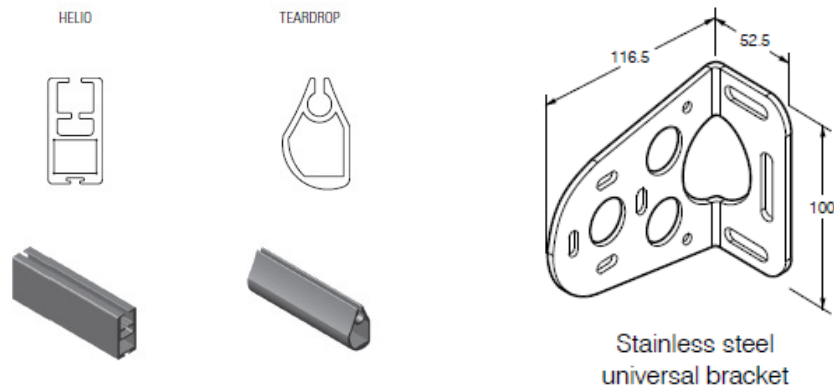

Stainless steel  
universal bracket